

**therdex**



## CHARACTERISTIC AND FAITHFUL OF NATURE

Distinctive floors with the atmosphere of wood and the advantages of LVT


# THE BASIS OF EVERY INTERIOR BEGINS WITH THE FLOOR

---

## **Floors with distinctive features**

The floor is the ultimate mood-setter and provides the space with the right character. In addition, the floor provides years of comfort. The focus of Therdex LVT floors is on ease of use through its durable and hard-wearing material. By providing a floor that can hardly be distinguished from the real thing, a luxurious and stylish LVT floor is ensured.





therdex



# CONTENT

**6**

---

## ABOUT THERDEX

- 6 What is LVT?
- 7 Dryback
- 7 Rigid Click
- 8 The story of Therdex
- 8 The five advantages
- 9 Create and combine
- 11 Sustainability

**12**

---

## COLLECTION STRUCTURE

- 14 Basic series
- 16 Regular series
- 20 Tapis series
- 22 Premium series
- 24 Chevron series
- 26 Rustique series
- 28 Original series
- 32 XstraLong series
- 34 Authentic series
- 36 Stone series
- 40 Loose Lay series
- 42 Design series

**44**

---

## COLLECTION LINKS

**46**

---

## INSPIRATION

**78**

---

## TECHNICAL SPECIFICATIONS

**91**

---

## RETAILERS

# WHAT IS LVT?

---

**LVT is a hard and brittle product and is based on petroleum (43%) and salt (57%). Adding plasticisers makes the LVT flexible. It is strong and lightweight. It can also be easily recycled, as it can be processed in many different ways.**

Therdex LVT floors have true-to-life patterns and are available in herringbone, long planks, chevron and tiles. All our products consist of 4 layers, namely: the PU layer, the wear layer, the film layer and the LVT backing.

The PU layer gives the plank extra protection and ensures the right mattness of LVT. The wear layer protects the floor from intensive use and makes it scratch-resistant. The film layer is the floor's print. It reveals the colour and structure of the floor. The LVT backing is the lowest part of the floor. This backing provides the strength of the floor and the right sound absorption.




# DRYBACK

---

Dryback LVT is a bonded floor. This bonded floor is sound dampening and very maintenance friendly. A leveled subfloor is very important for installing a dryback floor. Dryback is suitable for intensive domestic use, but also for project applications.

## Dryback features

- no subfloor required
- soundreducing
- water-resistant
- suitable for underfloor heating and cooling

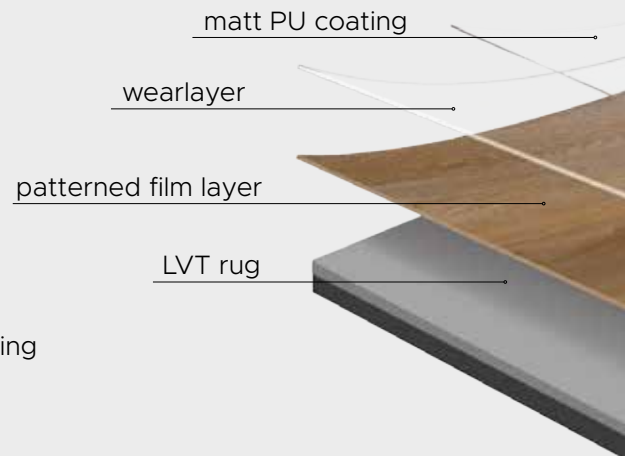


# RIGID CLICK

---

Rigid Click is a smart mounting solution and eliminates the need for glue. The planks or tiles are easily clicked together with a reliable Uniclic click system.

## Rigid Click features

- very easy to lay
- great ease of use
- suitable for intensive use
- powerful Uniclic system
- reduced impact noise
- moisture-resistant

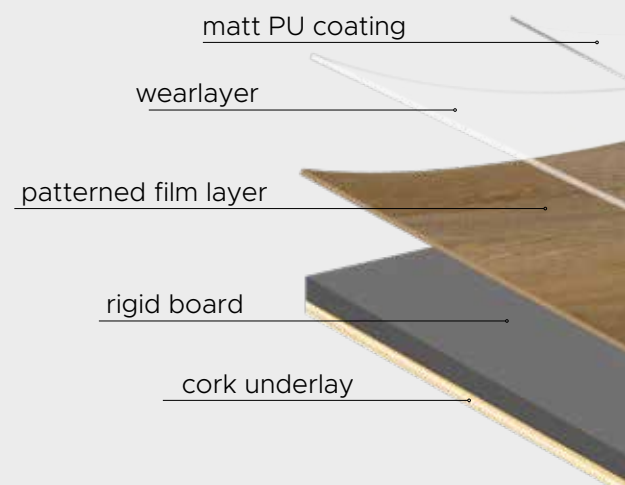

# THE STORY OF THERDEX

---

Therdex LVT floors is a characteristic and high-quality LVT brand that focuses on style-conscious consumers and professionals. Our products are not only distinctive on an aesthetic level, but also when it comes to environmentally friendly properties. This makes Therdex valued among architects, designers and interior lovers looking for a distinctive and durable floor.

## THE **FIVE** ADVANTAGES

---

**A LVT floor is widely applicable, long lasting and produces minimal noise. Therdex offers appropriate service for making your choice and maintaining your floor.**

### **INDISTINGUISHABLE FROM THE REAL THING**

When you choose Therdex, you choose a floor with a natural look. The entire collection is embossed to match. This means that the structure is visible and tangible. This makes the floors indistinguishable from the real thing.

### **ALWAYS AVAILABLE IN MULTIPLE VARIANTS**

The entire collection is available in multiple varieties. This offers exceptional opportunities. The designs are available in multiple sizes so they can be perfectly combined.

*Collection links p. 44*

### **PHTHALATE FREE THROUGH ORGANIC PLASTICISERS**

Therdex uses responsible and biodegradable soybean oil-based plasticisers. These plasticisers make the material elastic and flexible. These plasticisers are harmless to humans and the environment and are also biodegradable. This is important for you, for us and most importantly for the environment.

### **EASY TO MAINTAIN AND STREAK FREE**

All Therdex LVT floors consist of four layers. The top layers protect the floor from heavy use, are scratch resistant and prevent streaking. This combination provides an easy-to-maintain floor; simplicity and convenience.

### **FREE AND NO- OBLIGATION SAMPLE SERVICE**

Discover the colour and experience the natural feel of a Therdex LVT floor. Samples can be ordered from our website entirely free of charge and without obligation. We are happy to help you make the right choice.




# CREATE AND COMBINE


---

Create endless possibilities with Therdex LVT floors. The format of the herringbone planks allows for creativity. Combine own design and identity.


## Layout patterns




Irregular




Block<sup>1</sup>




Block<sup>2</sup>




Herringbone




Double  
herringbone



Whalebone




Chevron




Viennese point

## Finishing



Border



Border and piping



# SUSTAINABILITY

---

The floor is one of the most image-defining factors in the interior. There are many factors involved in making the right choice. When you opt for a Therdex LVT floor, you are getting a top product in all respects in which sustainability plays a major role.

## Phtalates

Phthalates are plasticisers. This group of chemicals are colourless, odourless viscous liquids. By adding a plasticiser to our LVT floors, the panels become more flexible, making it easier to lay the floor. The phthalates move through the space like condensation. When these phthalates become airborne, they can be harmful to your health. That's why we chose to keep Therdex floors free of phthalates, and use organic plasticisers.

## Organic plasticisers

In order to produce a good LVT floor, we add plasticisers to LVT. Plasticisers are used to make plastics elastic. These plasticisers should not pose a risk to human health. Therefore, there are strict requirements for the use of a number of plasticisers. Therdex uses organic plasticisers, the so-called isoborbide plasticisers. This is an organic plasticiser made from sorbitol and fatty acids. By building the plasticisers from sustainable soybean oil, they are biodegradable. During the production process, this soybean oil is non-polluting. As a result, our floors are certified with the ECO+ certificate

# CERTIFICATIONS

---

Delivering a top-notch product also involves caring for the environment. The environment belongs to all of us, everywhere in the world. We should handle it with care. This is why we place great importance on testing and approving our products. Naturally, our products comply with the mandatory labels, but in addition to these mandatory labels, we also have our products tested at test institutes that are not mandatory.



**ISO 9001  
certified**

**ISO 14001  
certified**

# COLLECTION STRUCTURE

---

## **The basis of every interior starts with the floor**

Discover the entire collection of Therdex LVT floors. From contemporary herringbone, to classic planks, modern Chevron or robust tiles. The entire collection of Therdex LVT floors is made up of series. Each series has the same pattern which are available in several colours and sizes.



# BASIC SERIES


---



Luxurious and sustainable; that characterises the Basic series. The perfect basis for every interior due the quiet design of this rustic oak floor. Available in planks of 2 mm thick.

<i>Type</i>	dryback
<i>Embossing</i>	universal embossed
<i>Dimension</i>	planks 23x122 cm
<i>Content</i>	15 pcs.   4,185 m <sup>2</sup>

*Extended specifications p.78*

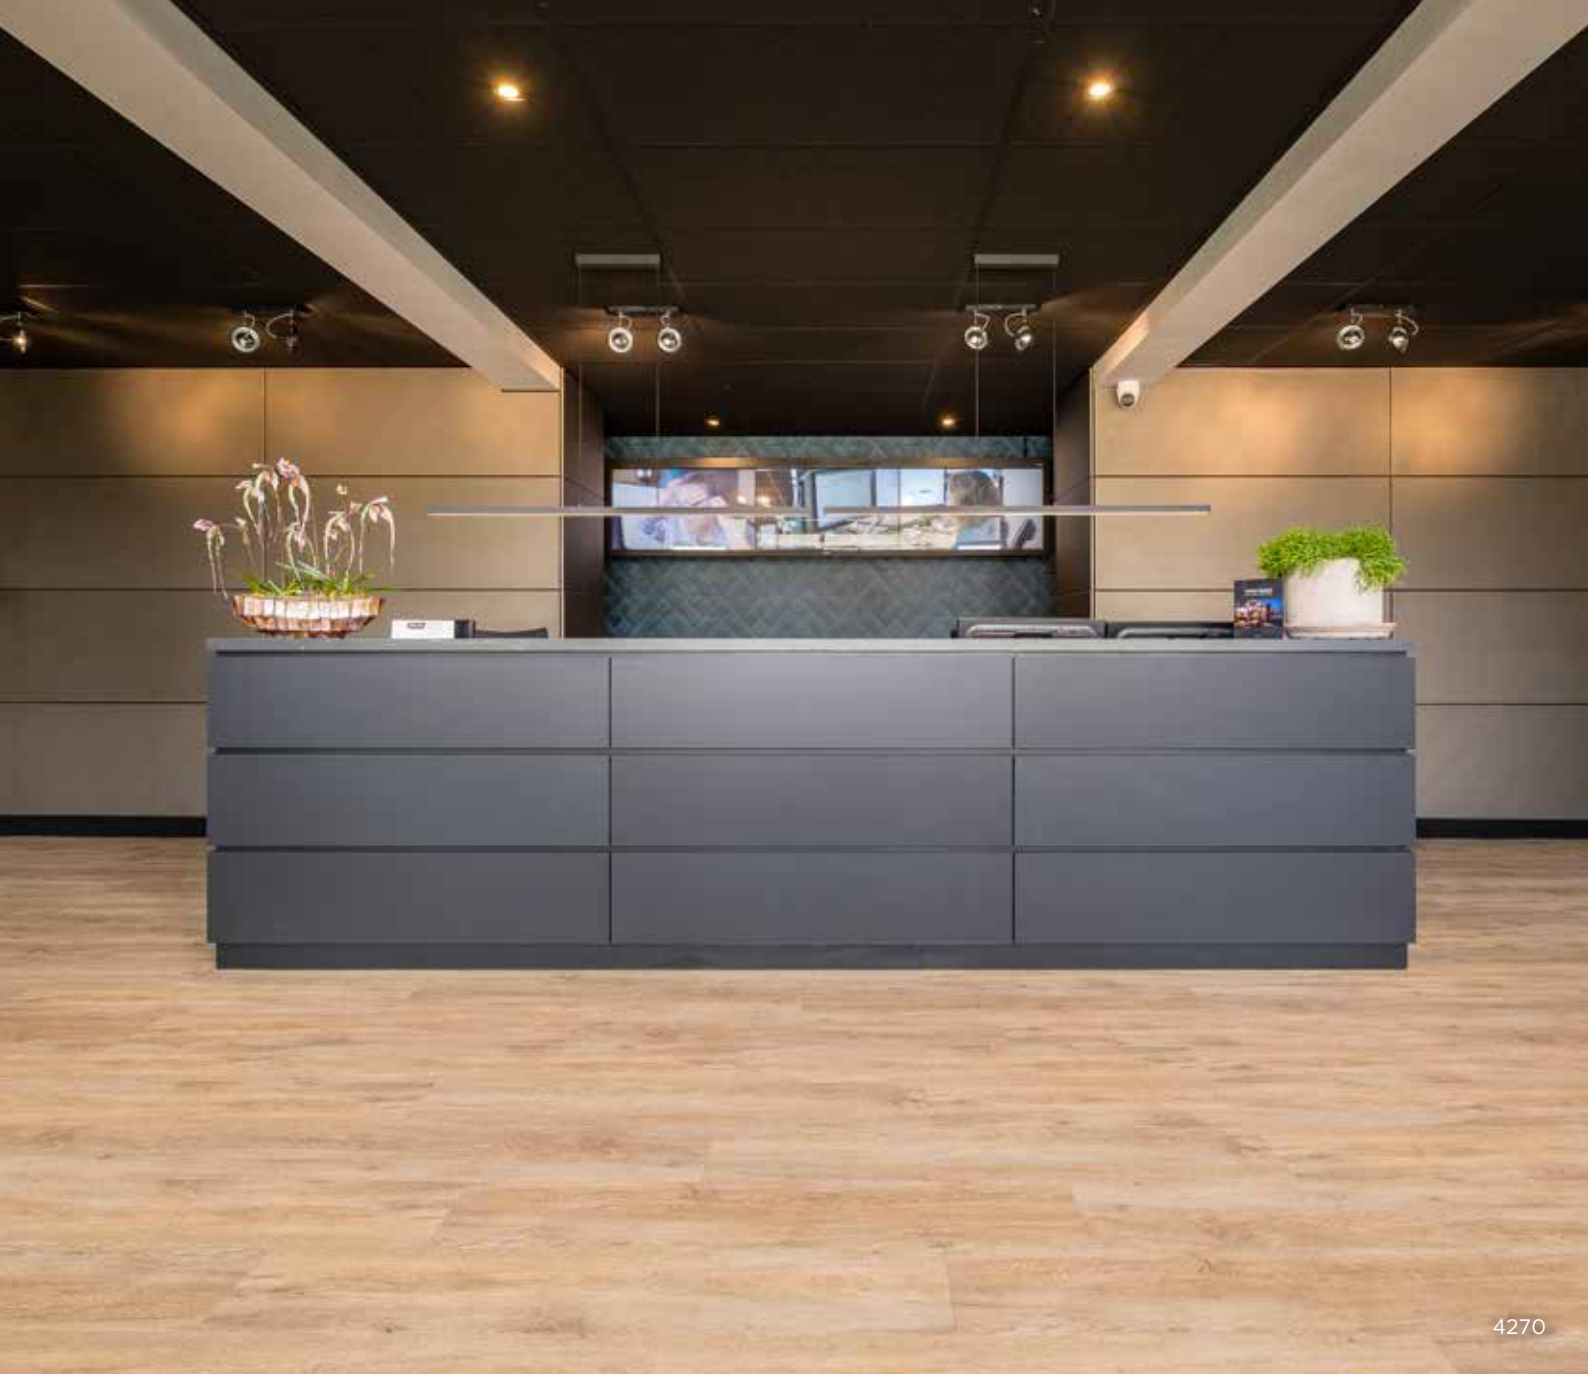

4270



2010



2040



2050



2060



4210



4230



4250



4270

# REGULAR<sup>1</sup> SERIES

---



The Regular<sup>1</sup> series is characterised by its natural and light tones. This series is available in both herringbone pattern and long planks. To give the floor a classic look, it can be combined with piping.

Type	dryback	
Embossing	universal embossed	
Dimension	herringbone 15x60 cm	planks 23x122 cm
Content	36 pcs.   3,345 m <sup>2</sup>	12 pcs.   3,345 m <sup>2</sup>

*Extended specifications p.79*






6025



6021



6024



6025



6026



2510



2540



2550



2560

# REGULAR<sup>2</sup> SERIES

---



6032

The warmth of the aged oak designs in the Regular<sup>2</sup> series will give any room an atmospheric and luxurious feel. It is a distinctive floor with the atmosphere of wood and the advantages of LVT. This series is available in herringbone pattern and long planks.

Type	dryback and Rigid Click	
Embossing	universal embossed	
Dimension	herringbone 15x60 cm	planks 23x122 cm
Content	36 pcs.   3,345 m <sup>2</sup>	12 pcs.   3,345 m <sup>2</sup>


*Extended specifications p.79*




6032



6031



6032\*



6033\*



6034



3010



3020\*



3030\*




3040

\*these items are available in dryback and Rigid Click: C3020, C3030, C6032 and C6033

# TAPIS SERIES

---

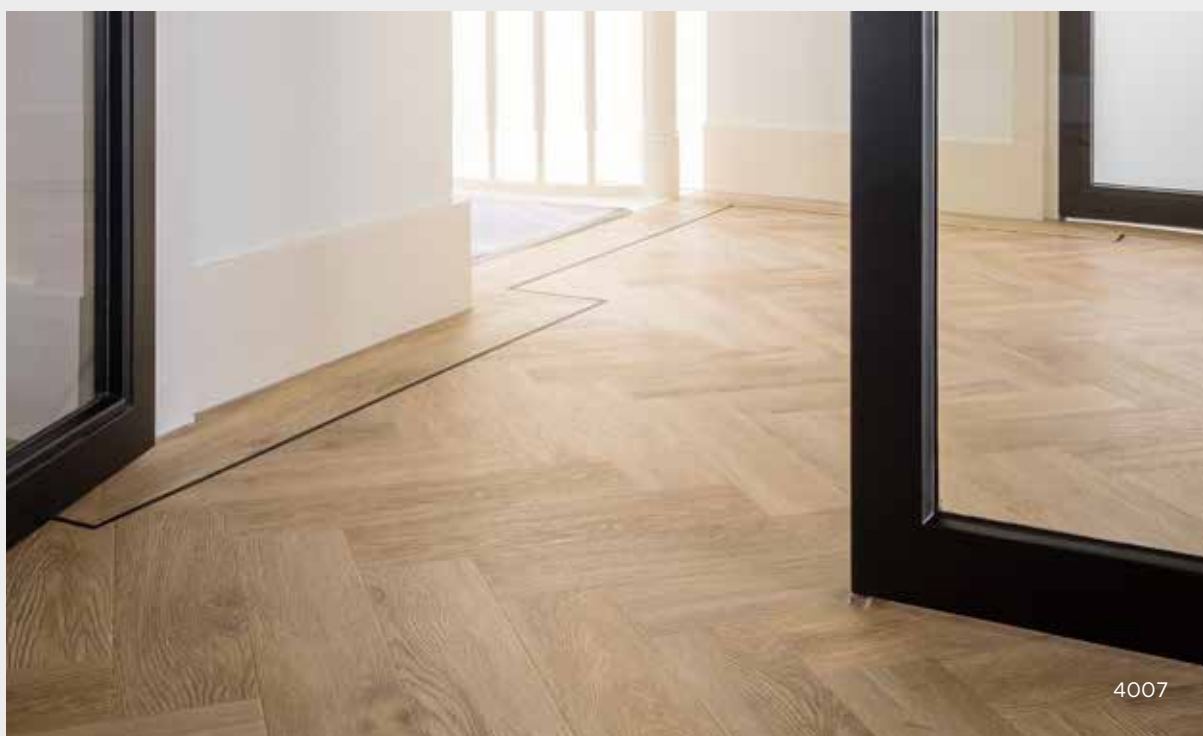

The Tapis series consists of a diverse colour palette of expressive designs with a characteristic structure. Available in herringbone pattern and long planks. The herringbone pattern consists of refined planks of 10x40 cm. The long plank measures 23x122 cm and is therefore more robust.

Type	dryback and Rigid Click	
Embossing	registered embossed	
Dimension	herringbone 10x40 cm	planks 23x122 cm
Content	34 pcs.   1,404 m <sup>2</sup>	12 pcs.   3,345 m <sup>2</sup>

*Extended specifications p.80*



4007



4001



4003



4005



4007



4010\*



4030\*



4050\*



4070\*

\*these items are available in dryback and Rigid Click: C4010, C4030, C4050 and C4070

# PREMIUM SERIES

---



Combine endless possibilities with the Premium series. The format of the herringbone planks offers a range of possibilities; the width fits four times the length, allowing the floor to be laid in various structures. Various colour shades and the tactile structure gives the floor a contemporary look with a modern twist.

<i>Type</i>	dryback and Rigid Click	
<i>Embossing</i>	registered embossed	
<i>Dimension</i>	herringbone 15x60 cm	planks 23x122 cm
<i>Content</i>	36 pcs.   3,345 m <sup>2</sup>	12 pcs.   3345 m <sup>2</sup>

*Extended specifications p.81 | Layout patterns p.9*




7004




7001\*



7004\*



7005



7006



70010\*



70040\*



70050



70060

\*these items are available in dryback and Rigid Click: C7001, C7004, C70010 and C70040

# CHEVRON SERIES

---



Create, combine and innovate. The Chevron series consists of calm natural tones in three different formats. A contemporary herringbone, a modern Chevron and classic long planks. All three have the same colour and structure, but different characters.

Type	dryback and Rigid Click		
Embossing	registered embossed		
Dimension	herringbone 15x60 cm	chevron 11x57 cm	planks 23x122 cm
Content	36 pcs.   3,345 m <sup>2</sup>	52 pcs.   3,397 m <sup>2</sup>	12 pcs.   3,345 m <sup>2</sup>

Extended specifications p.82 | Layout patterns p.9






6541



6041\*



6042\*



6043




6044



6541



6542



6543



6544



12041\*



12042\*



12043



12044

\* these items are available in dryback and Rigid Click: C6041, C6042, C12041 and C12042

# RUSTIQUE SERIES

---



A calm appearance is the basis of the Rustique series. The whole creates a calm atmosphere. The wood structure is clearly visible from close by. The entire series is available in both dryback and Rigid Click.

Type	dryback and Rigid Click	
Embossing	registered embossed	
Dimension	herringbone 15x75 cm	planks 23x152 cm
Content	26 pcs.   2,920 m <sup>2</sup>	10 pcs.   3,468 m <sup>2</sup>

*Extended specifications p.83*



7551



7551



15051



7554




15054



7552



15052



7555



15055



7553



15053

The entire Rustique series is available in both dryback and Rigid Click.

# ORIGINAL<sup>1</sup> SERIES

---



The diverse Original<sup>1</sup> series consists of various structures and formats, consisting of herringbone pattern and long planks. Identical in colour and structure, but different in format. The series is complemented by striking qualities with a robust appearance that do not detract from the authenticity.

Type	dryback and Rigid Click	
Embossing	registered embossed	
Dimension	herringbone 15x60 cm	planks 23x152 cm
Content	36 pcs.   3,345 m <sup>2</sup>	10 pcs.   3,484 m <sup>2</sup>

*Extended specifications p.84*



15011



7011\*



7012\*



7013



7014



15011\*



15012\*



15013



15014



15021\*



15022\*



15023



15024

\*these items are available in dryback and Rigid Click: C7011, C7012, C15011, C15012, C15021 and C15022

# ORIGINAL<sup>2</sup> SERIES

---



The wood structure on these robust planks of the Original<sup>2</sup> series is tangibly present. This gives you an optimal experience of nature fidelity. This combination creates a powerful and atmospheric whole, and is therefore very suitable for a modern and industrial interior.

Type	dryback	
Embossing	registered embossed	
Dimension	herringbone 15x75 cm	planks 23x152 cm
Content	30 pcs.   3,484 m <sup>2</sup>	10 pcs.   3,484 m <sup>2</sup>

*Extended specifications p.84*



7541



7541



15041



7544



15044



7542



15042



7545



15045



7543



15043



7546



15046

# XSTRALONG SERIES

---



Superlative class and style. The XstraLong series is characterised by its extra-long planks of 180 cm. Characterised by distinctive colours and natural wood structures.

<i>Type</i>	dryback
<i>Embossing</i>	registered embossed
<i>Dimension</i>	planks 23x183 cm
<i>Content</i>	8 pcs.   3,345 m <sup>2</sup>

*Extended specifications p.85*





18080



18010



18040



18050



18060



18070



18080



18090



18100

# AUTHENTIC SERIES

---



The natural-looking Authentic series exudes rusticity. The robust design contains a lived-in look by the clearly present knots. An optimal experience of natural faithfulness.

<i>Type</i>	dryback
<i>Embossing</i>	registered embossed
<i>Dimension</i>	planks 23x152 cm
<i>Content</i>	10 pcs.   3,484 m <sup>2</sup>

*Extended specifications p.86*



15062



15061



15062



15063



15064

# STONE<sup>1</sup> SERIES

---



The Stone<sup>1</sup> series consists of the Amato, Rustique and Concrete collections. All have the appearance of natural stone, but diverse in colour and texture. The Amato and Concrete collections are characterised by the playful texture of the tile. The Rustique is best described as a light pattern with a calm look.

Type	dryback and Rigid Click		
Embossing	universal embossed		
Dimension	Amato tiles 91x45 cm	tiles 91x91 cm	Rustique and Concrete tiles 100x100 cm
Content	9 pcs.   3,763 m <sup>2</sup>	5 pcs.   4,181 m <sup>2</sup>	4 pcs.   4 m <sup>2</sup>

Extended specifications p.87



10024

*Amato*



4511\*



4512\*



9011



9012

*Concrete*



10012



10013\*


*Rustique*




10021



10022\*



10023\*



10024



10016\*

\*these items are available in dryback and Rigid Click: C4511, C4512, C10013, C10016, C10022 and C10023  
Amato tiles 91x45 cm: 4511 and 4512 | Amato tiles 91x91 cm: 9011 and 9012

# STONE<sup>2</sup> SERIES

---



Bring warmth into every space with the Stone<sup>2</sup> series. The tiles subtly connect a seamless coherence between the interior and exterior by highlighting the monochrome colour and the cubic shape. The Graphic collection creates a very playful effect to enhance the floor in any interior. The Dynamic is distinguished by the hue of the design. A special block pattern typifies the Unique collection.

*Type*                   dryback  
*Embossing*          universal embossed  
*Dimension*         tiles 100x100 cm  
*Content*             4 pcs. | 4 m<sup>2</sup>  
*Extended specifications* p.87



10042

*Graphic*



10031



10032



10033



10034

*Dynamic*



10041



10042



10043



10044

*Unique*



10051



10052



10053



10054

# LOOSE LAY SERIES

---



The Loose Lay series offers convenience and comfort through the quick and easy way of laying. Because of their weight, the planks and tiles are laid loose. The durable quality of LVT ensures that the floor lasts a long time, even with intensive use. This makes this series ideally suited for project-based purposes.

<i>Type</i>	Loose Lay	
<i>Embossing</i>	universal embossed	
<i>Dimension</i>	planks 20x100 cm	tiles 100x100 cm
<i>Content</i>	8 pcs.   1,60 m <sup>2</sup>	2 pcs.   2 m <sup>2</sup>

*Extended specifications p.88*





*Planks*



LL100



LL110



LL120



LL130

*Tiles*



LL200



LL210



LL220



LL230



LL240



LL250

# DESIGN SERIES

---



The Design series is unique due to its various designs. The original patterns and structures gives every room an exceptional character. The design of this series is surprising and innovative.

<i>Type</i>	dryback	
<i>Embossing</i>	universal embossed	
<i>Dimension</i>	planks 23x152 cm	tiles 45x91 cm
<i>Content</i>	10 pcs.   3,468 m <sup>2</sup>	9 pcs.   3,763 m

*Extended specifications p.89*



*Planks*



15091



15095




15094



15092



15096



15097



15093

*Tiles*



4591



4592

# COLLECTION LINKS

## overview collection

### DRYBACK

SERIES	ARTICLE NUMBERS	DIMENSION	SPECIFICATIONS
<i>Regular<sup>1</sup></i>	6021   6024   6025   6026	60,96 x 15,24 cm	herringbone
<i>Basic</i>	2010   2040   2050   2060	121,90 x 22,80 cm	thickness 2,00 mm
<i>Regular<sup>1</sup></i>	2510   2540   2550   2560	121,90 x 22,80 cm	planks
<i>XstraLong</i>	18010   18040   18050   18060	182,90 x 22,80 cm	thickness 3,00 mm
<i>Tapis</i>	4001   4003   4005   4007	40,64 x 10,16 cm	herringbone
<i>Basic</i>	4210   4230   4250   4270	121,90 x 22,80 cm	thickness 2,00 mm
<i>Tapis</i>	4010   4030   4050   4070	121,90 x 22,80 cm	planks
<i>Regular<sup>2</sup></i>	6031   6032*   6033*   6034	60,96 x 15,24 cm	herringbone
<i>Regular<sup>2</sup></i>	3010   3020*   3030*   3040	121,90 x 22,80 cm	planks
<i>Premium</i>	7001*   7004*   7005   7006	60,96 x 15,24 cm	herringbone
<i>Premium</i>	70010*   70040*   70050   70060	121,90 x 22,80 cm	planks
<i>Chevron</i>	6041*   6042*   6043   6044	60,96 x 15,24 cm	herringbone
<i>Chevron</i>	6541   6542   6543   6544	57,15 x 11,43 cm	chevron
<i>Chevron</i>	12041*   12042*   12043   12044	121,90 x 22,80 cm	planks
<i>Rustique</i>	7551*   7552*   7553*   7554*   7555*	74,90 x 15,00 cm	herringbone
<i>Rustique</i>	15051*   15052*   15053*   15054*   15055*	151,70 x 22,8 cm	planks
<i>Original<sup>1</sup></i>	7011*   7012*   7013   7014	60,96 x 15,24 cm	herringbone
<i>Original<sup>1</sup></i>	15011*   15012*   15013   15014	151,70 x 22,80 cm	planks
<i>Original<sup>2</sup></i>	7541   7542   7543   7544   7545   7546	76,20 x 15,24 cm	herringbone
<i>Original<sup>2</sup></i>	15041   15042   15043   15044   15045   15046	152,40 x 22,80 cm	planks
<i>Stone<sup>1</sup></i>	9011   9012	91,44 x 91,44 cm	tiles
<i>Stone<sup>1</sup></i>	4511*   4512*	91,44 x 45,72 cm	tiles
<i>Stone<sup>1</sup></i>	10012   10013*   10021   10022*   10023*   10024	100 x 100 cm	tiles
<i>Loose Lay</i>	LL200   LL210   LL220   LL230   LL240   LL250	100 x 100 cm	tiles

\*these items are available in dryback and Rigid Click

All dryback are supplied as standard with a thickness of 2,50 mm apart of the Basic series and XstraLong series.



## RIGID CLICK

SERIES	ARTICLE NUMBERS	DIMENSION	SPECIFICATIONS
<i>Regular<sup>1</sup></i> <i>Regular<sup>1</sup></i>	C6032   C6033 C3020   C3030	74,30 x 14,50 cm 121,30 x 22,20 cm	herringbone planks
<i>Premium</i> <i>Premium</i>	C7001   C7004 C70010   C70040	74,30 x 14,50 cm 121,30 x 22,20 cm	herringbone planks
<i>Chevron</i> <i>Chevron</i>	C6041   C6042 C12041   C12042	74,30 x 14,50 cm 121,30 x 22,20 cm	herringbone planks
<i>Rustique</i> <i>Rustique</i>	C7551   C7552   C7553   C7554   C7555 C15051   C15052   C15053   C15054   C15055	74,30 x 14,50 cm 151,80 x 23,60 cm	herringbone planks
<i>Original<sup>1</sup></i> <i>Original<sup>1</sup></i>	C7011   C7012 C15011   C15012	74,30 x 14,50 cm 151,80 x 23,60 cm	herringbone planks

All Rigid Click planks are supplied with a standard thickness of 6,00 mm.





HOME INSPIRATION

Floor

6542









**HOME INSPIRATION**

*Floor*

10051







**ACTIVE VASTGOED, ARNHEM**

*Realized by Valk Design*



Floor

7001





HOME INSPIRATION

Floor

15011







HOME INSPIRATION

Floor

10031









HOME INSPIRATION

Floor

6032







**NVAO, DEN HAAG**  
Realized by Void Interieurarchitectuur

Floor

2550







VAN DER VALK, APeldoorn



Floor

7004





**HOME INSPIRATION**

*Floor*

10042










DE KAAIHOF, GENEMUIDEN



Floor

6043



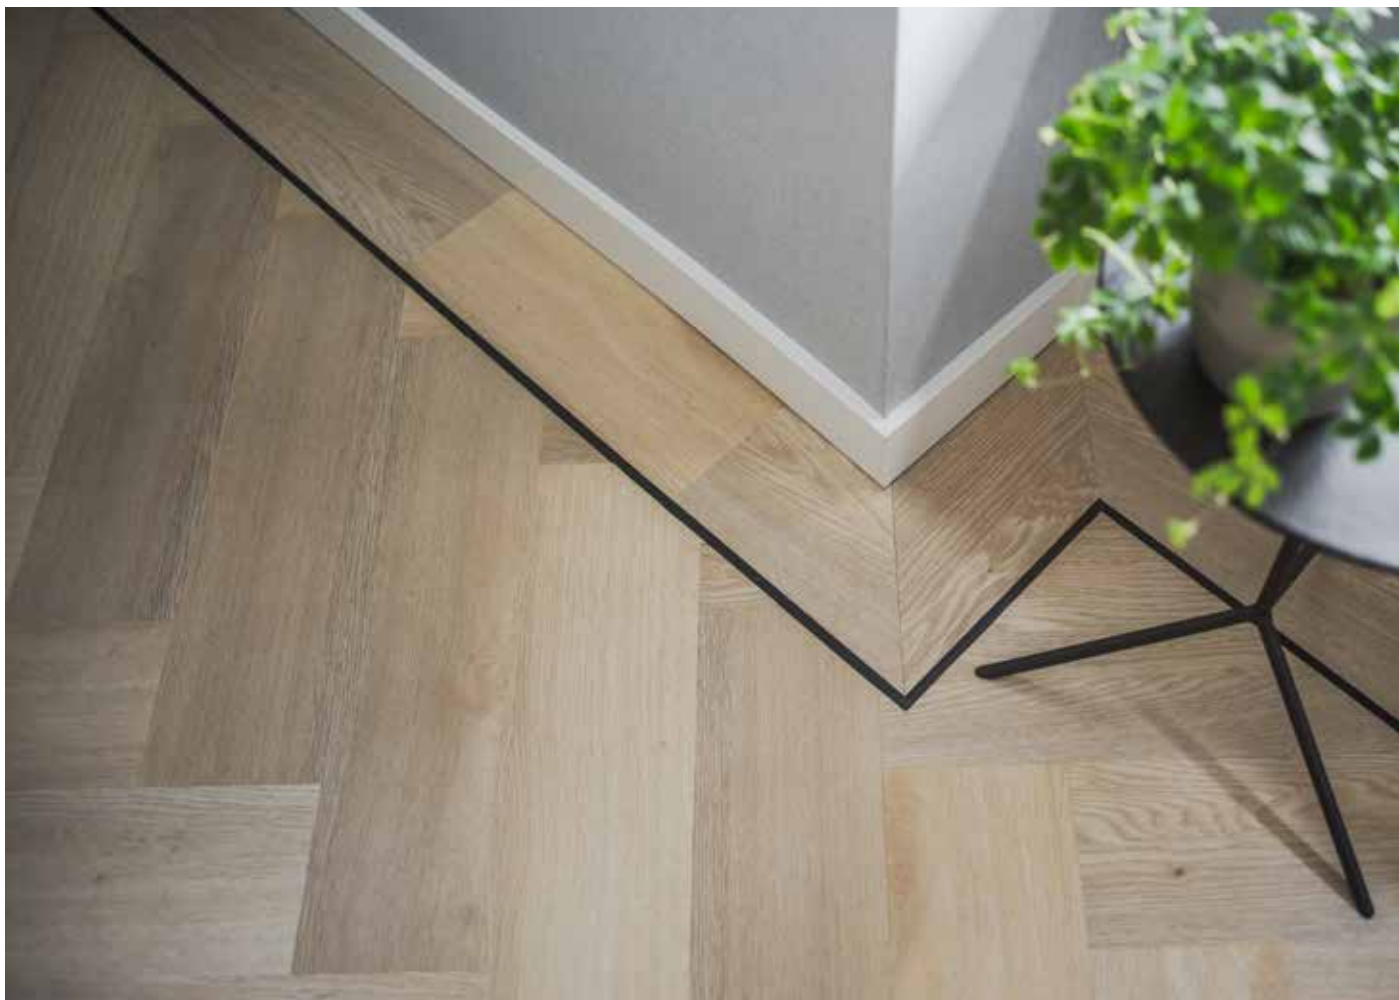

HOME INSPIRATION

Floor

7001







**HOME INSPIRATION**  
*Realized by Designa Architectuur*

Floor

6541







**MARIËL HAIRSTYLING, RAALTE**

*Realized by Haarco*



Floor

10013







HOME INSPIRATION

Floor

6042







**HOME INSPIRATION**

Realized by Brugmans Groep

Floor

6544







HOME INSPIRATION

Floor



7011



# BASIC SERIES

Features	Standard	Planks
Floorcovering	EN 649	Heterogeneous LVT floorcovering
Completion		Matte particle laquer
Design		Wood
Embossing		Universal Embossed
Colors		8
Measurements planks	EN 427	121,9 x 22,8 cm
Bevelling		N/A
Packaging		15 pieces (4.185 m <sup>2</sup> )
Weight	EN 430	ca. 3500 g/m <sup>2</sup>
Total thickness	EN 428	2,0 mm
Thickness PU lacquer	EN 429	0,30 mm
Classification	EN 685	23, 31
Fire classification	EN 13501	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS
Weargroup	EN 649	T
Residual indentation	EN 433	< 0,1 mm
Dimension stability	EN 434	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W
Floor heating	EN14041	Yes, max. 27 °C
Colourfastness	ISO 105-B02	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV
AgBB VOC test		Approved
REACH regulation (EC)		1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes



<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

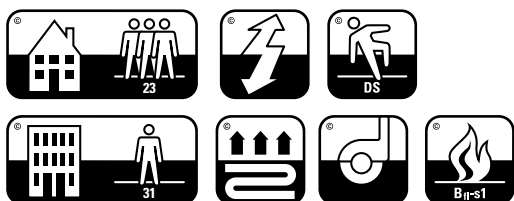

# REGULAR SERIES



Features	Standard	Planks	Herringbone
Floorcovering	EN 649	Heterogeneous LVT floorcovering	Heterogeneous LVT floorcovering
Completion		Matte particle laquer	Matte particle laquer
Design		Wood	Wood
Embossing		Universal Embossed	Universal Embossed
Colors		8	8
Measurements planks	EN 427	121,9 x 22,8 cm	15,24 x 60,96 cm
Bevelling		all sides	all sides
Packaging		12 pieces (3.345 m <sup>2</sup> )	36 pieces (3.345 m <sup>2</sup> )
Weight	EN 430	ca. 4315 g/m <sup>2</sup>	ca. 4315 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm	0,55 mm
Classification	EN 685	23, 33, 42	23, 33, 42
Fire classification	EN 13501	Bfl-S1	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS	R9 DS
Weargroup	EN 649	T	T
Residual indentation	EN 433	< 0,1 mm	< 0,1 mm
Dimension stability	EN 434	< 0,1%	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W	Yes, type W
Floor heating	EN14041	Yes, max. 27 °C	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV	Suisse Norm SNV
AgBB VOC test		Approved	Approved
REACH regulation (EC)		1907/2006	1907/2006
CE, AGBB, Dibt, Eurofins, Floor-score, A+, ISO9001, ISO14001		Yes	Yes

<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

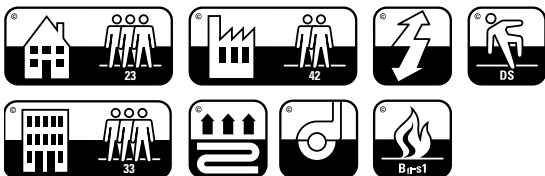

# TAPIS SERIES

Features	Standard	Planks	Herringbone
Floorcovering	EN 649	Heterogeneous LVT floorcovering	Heterogeneous LVT floorcovering
Completion		Matte particle laquer	Matte particle laquer
Design		Wood	Wood
Embossing		Registered Embossed	Registered Embossed
Colors		4	4
Measurements planks	EN 427	121,9 x 22,8 cm	10,16 x 40,64 cm
Bevelling		all sides	all sides
Packaging		12 pieces (3.345 m <sup>2</sup> )	34 pieces (1.404 m <sup>2</sup> )
Weight	EN 430	ca. 4315 g/m <sup>2</sup>	ca. 4315 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm	0,55 mm
Classification	EN 685	23, 33, 42	23, 33, 42
Fire classification	EN 13501	Bfl-S1	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS	R9 DS
Weargroup	EN 649	T	T
Residual indentation	EN 433	< 0,1 mm	< 0,1 mm
Dimension stability	EN 434	< 0,1%	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W	Yes, type W
Floor heating	EN14041	Yes, max. 27°C	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV	Suisse Norm SNV
AgBB VOC test		Approved	Approved
REACH regulation (EC)		1907/2006	1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes	Yes


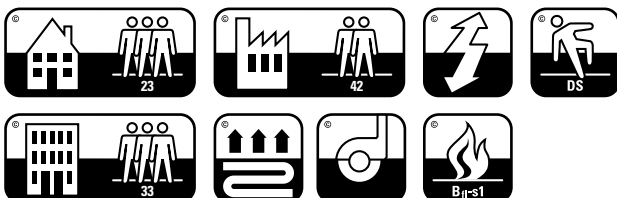




# PREMIUM SERIES

Features	Standard	Planks	Herringbone
Floorcovering	EN 649	Heterogeneous LVT floorcovering	Heterogeneous LVT floorcovering
Completion		Matte particle laquer	Matte particle laquer
Design		Wood	Wood
Embossing		Registered Embossed	Registered Embossed
Colors		4	4
Measurements planks	EN 427	121,9 x 22,8 cm	15,24 x 60,96 cm
Bevelling		all sides	all sides
Packaging		12 pieces (3.345 m <sup>2</sup> )	36 pieces (3.345 m <sup>2</sup> )
Weight	EN 430	ca. 4315 g/m <sup>2</sup>	ca. 4315 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm	0,55 mm
Classification	EN 685	23, 33, 42	23, 33, 42
Fire classification	EN 13501	Bfl-S1	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS	R9 DS
Weargroup	EN 649	T	T
Residual indentation	EN 433	< 0,1 mm	< 0,1 mm
Dimension stability	EN 434	< 0,1%	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W	Yes, type W
Floor heating	EN14041	Yes, max. 27°C	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV	Suisse Norm SNV
AgBB VOC test		Approved	Approved
REACH regulation (EC)		1907/2006	1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes	Yes



<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

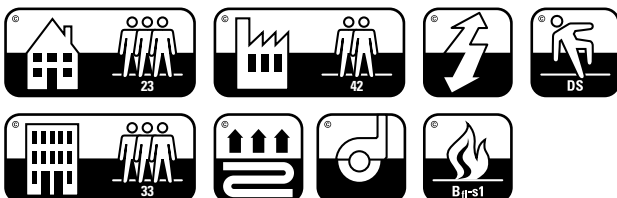

# CHEVRON SERIES

Eigenschappen	Norm	
Floorcovering	EN 649	Heterogeneous LVT floorcovering
Completion		Matte particle laquer
Design		Wood
Embossing		Registered Embossed
Colors		4
Measurements planks	EN 427	11,43 x 57,15 cm (chevron) 15,24 x 60,96 cm (herringbone) 22,8 x 121,9 cm (planks)
Bevelling		aan alle zijden
Packaging		52 pieces (3.397 m <sup>2</sup> ) (chevron) 36 pieces (3.345 m <sup>2</sup> ) (herringbone) 12 pieces (3.345 m <sup>2</sup> ) (planks)
Weight	EN 430	ca. 4315 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm
Classification	EN 685	23, 33, 42
Fire classification	EN 13501	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS
Weargroup	EN 649	T
Residual indentation	EN 433	< 0,1 mm
Dimension stability	EN 434	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W
Floor heating	EN14041	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV
AgBB VOC test		Approved
REACH regulation (EC)		1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes



<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

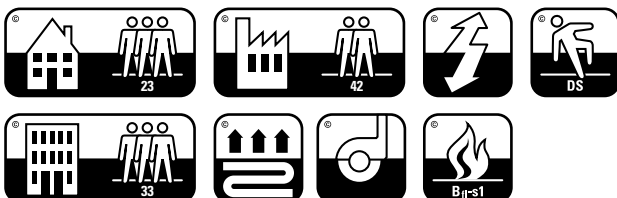

# RUSTIQUE SERIES

Features	Standard	Planks	Herringbone
Floorcovering	EN 649	Heterogeneous LVT floorcovering	Heterogeneous LVT floorcovering
Completion		Matte particle laquer	Matte particle laquer
Design		Wood	Wood
Embossing		Registered Embossed	Registered Embossed
Colors		5	5
Measurements planks	EN 427	22,8 x 151,7 cm (planks)	15,00 x 74,90 cm (herringbone)
Bevelling		all sides	all sides
Packaging		22,8 x 151,7 cm: 10 pieces (3.468 m <sup>2</sup> )	15,00 x 74,90 cm: 26 pieces (2.920 m <sup>2</sup> )
Weight	EN 430	ca. 4315 g/m <sup>2</sup>	ca. 4315 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm	0,55 mm
Classification	EN 685	23, 33, 42	23, 33, 42
Fire classification	EN 13501	Bfl-S1	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS	R9 DS
Weargroup	EN 649	T	T
Residual indentation	EN 433	< 0,1 mm	< 0,1 mm
Dimension stability	EN 434	< 0,1%	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W	Yes, type W
Floor heating	EN14041	Yes, max. 27°C	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV	Suisse Norm SNV
AgBB VOC test		Approved	Approved
REACH regulation (EC)		1907/2006	1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes	Yes



<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

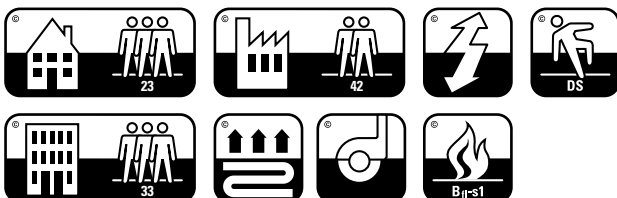

# ORIGINAL SERIES

Features	Standard	Planks	Herringbone
Floorcovering	EN 649	Heterogeneous LVT floorcovering	Heterogeneous LVT floorcovering
Completion		Matte particle laquer	Matte particle laquer
Design		Wood	Wood
Embossing		Registered Embossed	Registered Embossed
Colors		14	10
Measurements planks	EN 427	22,8 x 151,7 cm (15011 to 15024) 22,8 x 152,4 cm (15041 to 15046)	60,96 x 15,25 cm (7011 to 7014) 76,20 x 15,24 cm (7541 to 7546)
Bevelling		all sides	all sides
Packaging		22,8 x 151,7 cm: 10 pieces (3.468 m <sup>2</sup> ) 22,8 x 152,4 cm: 10 stuks (3.484 m <sup>2</sup> )	60,96 x 15,25 cm: 36 pieces (3.345 m <sup>2</sup> ) 15,24 x 76,20 cm: 30 pieces (3.484 m <sup>2</sup> )
Weight	EN 430	ca. 5178 g/m <sup>2</sup>	ca. 5178 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm	0,55 mm
Classification	EN 685	23, 33, 42	23, 33, 42
Fire classification	EN 13501	Bfl-S1	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS	R9 DS
Weargroup	EN 649	T	T
Residual indentation	EN 433	< 0,1 mm	< 0,1 mm
Dimension stability	EN 434	< 0,1%	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W	Yes, type W
Floor heating	EN14041	Ja, max. 27°C	Ja, max. 27°C
Colourfastness	ISO 105-B02	6> Grade	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV	Suisse Norm SNV
AgBB VOC test		Approved	Approved
REACH regulation (EC)		1907/2006	1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes	Yes



<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemical contact us.



# XSTRALONG SERIES

Features	Standard	Planks
Floorcovering	EN 649	Heterogeneous LVT floorcovering
Completion		Matte particle laquer
Design		Wood
Embossing		Registered Embossed
Colors		8
Measurements planks	EN 427	182,9 x 22,8 cm
Bevelling		aan alle zijden
Packaging		8 pieces (3.345 m <sup>2</sup> )
Weight	EN 430	ca. 5178 g/m <sup>2</sup>
Total thickness	EN 428	3,0 mm
Thickness PU lacquer	EN 429	0,55 mm
Classification	EN 685	23, 33, 42
Fire classification	EN 13501	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS
Weargroup	EN 649	T
Residual indentation	EN 433	< 0,1 mm
Dimension stability	EN 434	< 0,1%
Soundreduction	EN140-8	ca. 7 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W
Floor heating	EN14041	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV
AgBB VOC test		Approved
REACH regulation (EC)		1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes



<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

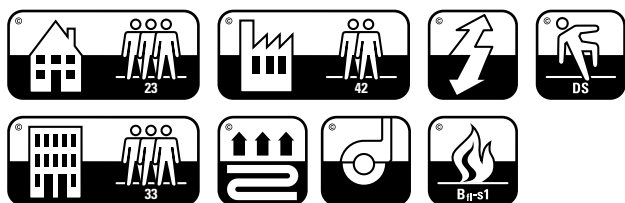

# AUTHENTIC SERIES

Features	Norm	Planks
Floorcovering	EN 649	Heterogeneous LVT floorcovering
Completion		Matte particle laquer
Design		Wood
Embossing		Registered Embossed
Colors		4
Measurements planks	EN 427	22,80 x 152,4 cm
Bevelling		all sides
Packaging		22,80 x 152,4 cm: 10 pieces (3,484 m <sup>2</sup> )
Weight	EN 430	ca. 5178 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm
Classification	EN 685	23, 33, 42
Fire classification	EN 13501	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS
Weargroup		
Residual indentation	EN 649	T
Dimension stability	EN 433	< 0,1 mm
Soundreduction	EN 434	< 0,1%
Thermal conductivity	EN140-8	ca. 5 dB(A)
Electrical Conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w
Suitable for castor chairs	EN 1081	app 10 <sup>11</sup> Ohm
Floor heating	EN 425	Yes, type W
Colourfastness	EN14041	Yes, max. 27°C
Resistance to chemicals	ISO 105-B02	6> Grade
Odor control	EN 423 EN ISO 26987	Yes, see 1
AgBB VOC test	ISO 16000-28	Suisse Norm SNV
REACH regulation (EC)		Approved
CE, AGBB, Dibt, Eurofins, Floor-score, A+, ISO9001, ISO14001		1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes



<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

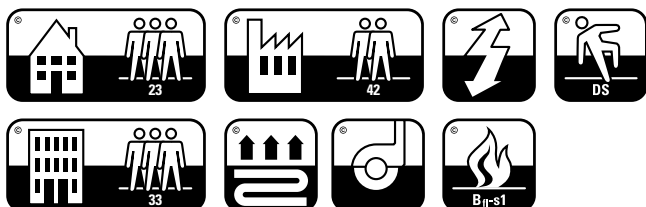

# STONE SERIES

Features	Standard	Tiles
Floorcovering	EN 649	Heterogeneous LVT floorcovering
Completion		Matte particle laquer
Design		Concrete / Amato / Rustique
Embossing		Universal Embossed
Colors		14
Measurements planks	EN 427	45,72 x 91,44 cm 91,44 x 91,44 cm 100 x 100 cm
Bevelling		all sides
Packaging		45,72 x 91,44 cm: 9 pieces (3.763 m <sup>2</sup> ) 91,44 x 91,44 cm: 5 pieces (4.181 m <sup>2</sup> ) 100 x 100 cm: 4 pieces (4 m <sup>2</sup> )
Weight	EN 430	ca. 4315 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm
Classification	EN 685	23, 33, 42
Fire classification	EN 13501	Bfl-S1
Slipresistance	DIN 51130 / EN 13893	R9 / DS
Weargroup	EN 649	T
Residual indentation	EN 433	< 0,1 mm
Dimension stability	EN 434	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W
Floor heating	EN14041	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV
AgBB VOC test		Approved
REACH regulation (EC)		1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes


<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

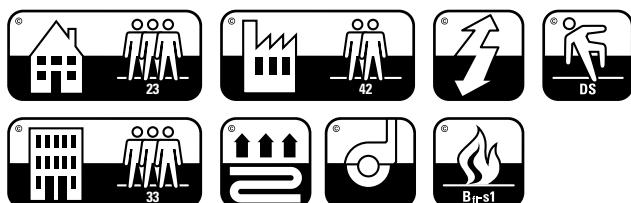

# LOOSE LAY SERIES

Features	Standard	Planks
Floorcovering	EN 649	Heterogeneous LVT floorcovering
Completion		Matte particle lacquer
Design		Wood / Concrete / Rustique
Embossing		Universal Embossed
Colors		Planks: 4 Tiles: 6
Measurements planks	EN 427	Wood: 20x100 cm Stone: 100x100 cm
Bevelling		all sides
Packaging		Planks: 8 pieces (1,60 m <sup>2</sup> ) Tiles: 2 pieces (2,00 m <sup>2</sup> )
Weight	EN 430	ca. 9050 g/m <sup>2</sup>
Total thickness	EN 428	5,0 mm
Thickness PU lacquer	EN 429	0,55 mm
Classification	EN 685	23, 33, 42
Fire classification	EN 13501	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS
Weargroup	EN 649	T
Residual indentation	EN 433	< 0,1 mm
Dimension stability	EN 434	< 0,1%
Soundreduction	EN140-8	ca. 10 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W
Floor heating	EN14041	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV
AgBB VOC test		Approved
REACH regulation (EC)		1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes

<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.


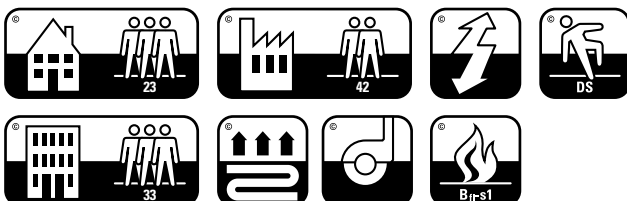




# DESIGN SERIES

Features	Standard	Planks
Floorcovering	EN 649	Heterogeneous LVT floorcovering
Completion		Matte particle laquer
Design		Wood
Embossing		Universal Embossed
Colors		Planks: 7 Tiles: 2
Measurements planks	EN 427	22,8 x 151,7 cm (planks) 45,72 x 91,44 cm (tiles)
Bevelling		all sides
Packaging		22,8 x 151,7 cm: 10 pieces (3.468 m2) 45,72 x 91,44 cm: 9 pieces (3.763 m2)
Weight	EN 430	ca. 5178 g/m <sup>2</sup>
Total thickness	EN 428	2,5 mm
Thickness PU lacquer	EN 429	0,55 mm
Classification	EN 685	23, 33, 42
Fire classification	EN 13501	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R9 DS
Weargroup	EN 649	T
Residual indentation	EN 433	< 0,1 mm
Dimension stability	EN 434	< 0,1%
Soundreduction	EN140-8	ca. 5 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,02 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W
Floor heating	EN14041	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV
AgBB VOC test		Approved
REACH regulation (EC)		1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes



<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

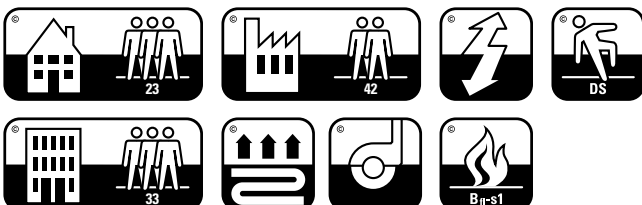

# RIGID CLICK

Features	Standard	Planks
Floorcovering	EN 649	Heterogeneous LVT floorcovering
Completion		Matte particle lacquer
Design		Wood / stone
Embossing		Hout: Registered / universal Embossed Stone: Overall Embossed
Colors		14 / 6
Backing		Click on cork
Measurements planks	EN 427	Wood: 151,8 x 23,6 cm   121,3 x 22,2 cm Stone: 45,1 x 90,8 cm
Bevelling		aan alle zijden
Packaging		Wood: 6 pieces (2.139 m <sup>2</sup> )   6 pieces (1.617 m <sup>2</sup> ) Stone: 4 pieces (1.638 m <sup>2</sup> )
Weight	EN 430	ca. 9600 g/m <sup>2</sup>
Total thickness	EN 428	6,0 mm
Thickness PU lacquer	EN 429	0,55 mm
Classification	EN 685	23, 33, 42
Fire classification	EN 13501	Bfl-S1
Slipresistance	DIN 51130 EN 13893	R10 DS
Weargroup	EN 649	T
Residual indentation	EN 433	< 0,1 mm
Dimension stability	EN 434	< 0,1%
Soundreduction	EN140-8	ca. 10 dB(A)
Thermal conductivity	EN12667 DIN 52612	0,049 m <sup>2</sup> k/w
Electrical Conductivity	EN 1081	app 10 <sup>11</sup> Ohm
Suitable for castor chairs	EN 425	Yes, type W
Floor heating	EN14041	Yes, max. 27°C
Colourfastness	ISO 105-B02	6> Grade
Resistance to chemicals	EN 423 EN ISO 26987	Yes, see 1
Odor control	ISO 16000-28	Suisse Norm SNV
AgBB VOC test		Approved
REACH regulation (EC)		1907/2006
CE, AGBB, Dibt, Eurofins, Floorscore, A+, ISO9001, ISO14001		Yes

<sup>1</sup>Resistance depending on concentration and exposure time, with prolonged action of oils, fats, acids, alkalis and other aggressive chemicals please contact us.

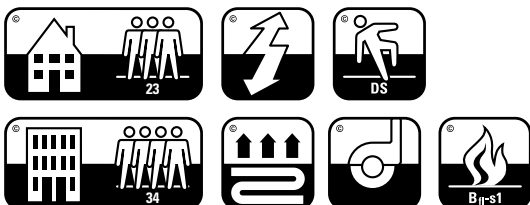


# FIND YOUR RETAILER


---

Always a Therdex retailer near you. The advisers knows everything about LVT flooring and the Therdex collections inside out.

Feel free to visit, our retailers will be happy to advise you.



[www.therdex.nl/en/dealers](http://www.therdex.nl/en/dealers)



**therdex**

Therdex LVT floors | Sasdijk 14 | 8281 BM Genemuiden | The Netherlands  
+31 (0)38 385 7373 | [info@therdex.nl](mailto:info@therdex.nl) | [www.therdex.nl](http://www.therdex.nl)

No rights may be derived from this brochure. Misprints and printing errors excepted. The colours illustrated may differ from reality. We therefore recommend We therefore recommend that you make your choice on the basis of samples. You can obtain these, free of charge and without obligation, from your dealer or via [www.therdex.nl](http://www.therdex.nl).